


PUSH-OPEN

SYNCHRONIZED



3-Fold **push-open** concealed drawer slide(with handle)

Technical specifications:

- Main material: cold-rolled steel.
- Max loading capacity: 30kg.
- Life guarantee: 50,000 cycles.
- Thickness of board: $\leq 16\text{mm}$
 $\leq 19\text{mm}$
- Usage: variety of drawers.
- Full extension, slide-click front fixing device, easy height adjustment.
- Outstanding sliding stability.
- Easy and safe mounting and dismounting for drawers.
- bear the synchronized system function.

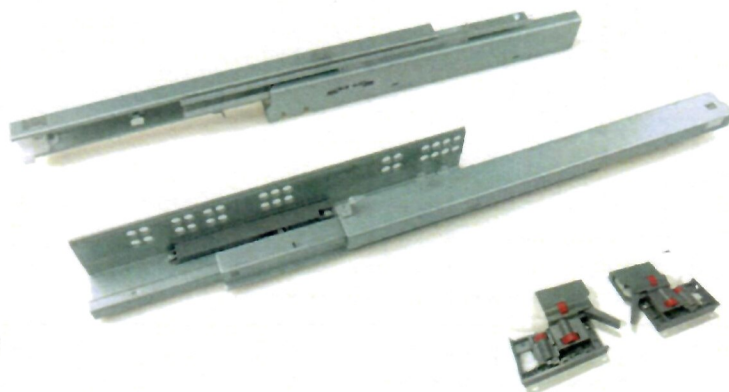


Installation dimensions

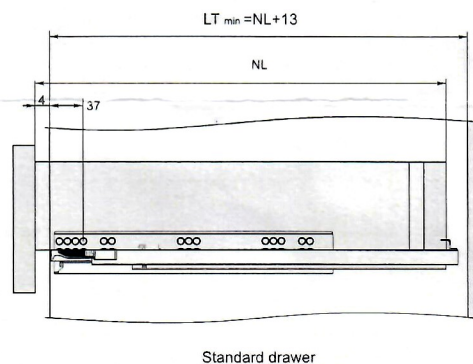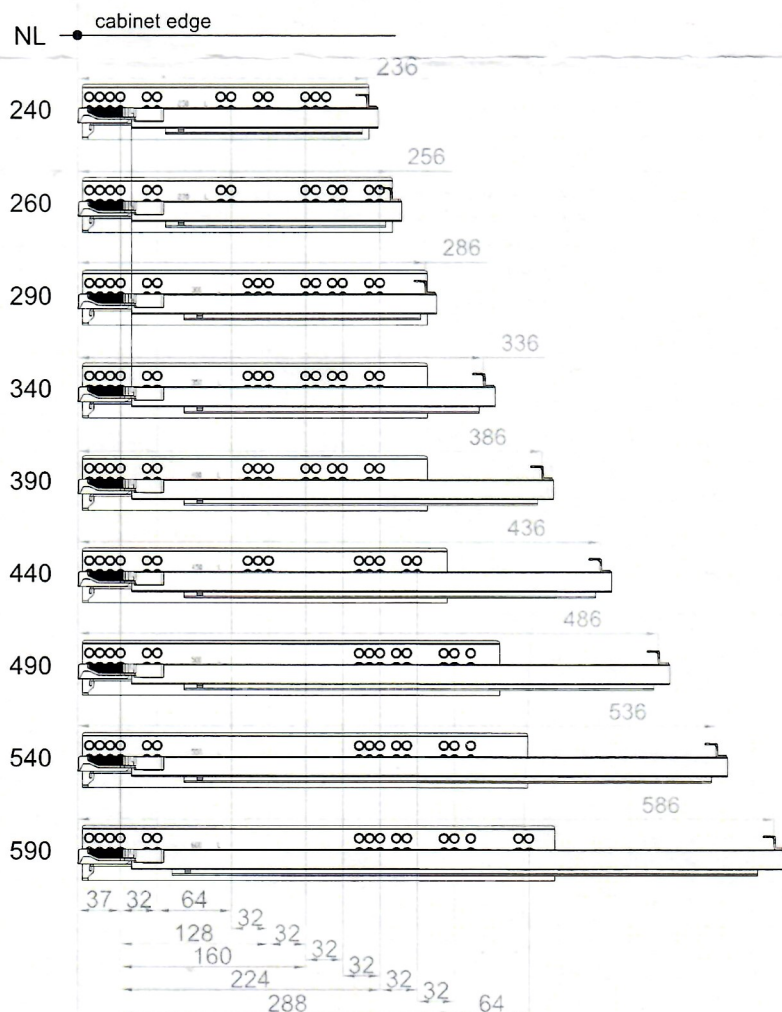


LT - Cabinet inner depth
NL - nominal slide length

3-Fold **push-open** concealed drawer slide(with handle)

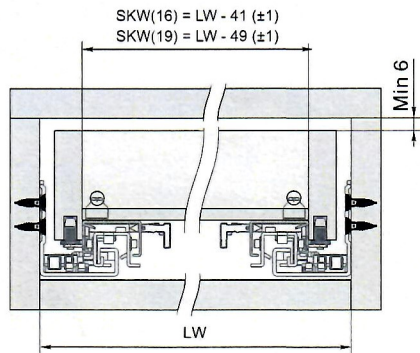


LW - Cabinet inner width
 SKW(16) - Drawer inner width(≤16mm drawer side thickness)
 SKW(19) - Drawer inner width(≤19mm drawer side thickness)

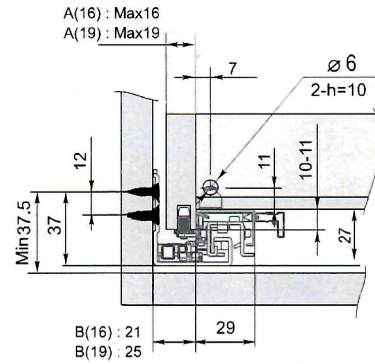


A(16) - Be used for slide rails with a drawer side thickness no greater than 16mm.
 B(16) - Be used for slide rails with a drawer side thickness no greater than 16mm.
 A(19) - Be used for slide rails with a drawer side thickness no greater than 19mm.
 B(19) - Be used for slide rails with a drawer side thickness no greater than 19mm.


1. Install the slides on the cabinet



2. Install left/ right handle in the front of the drawer




3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

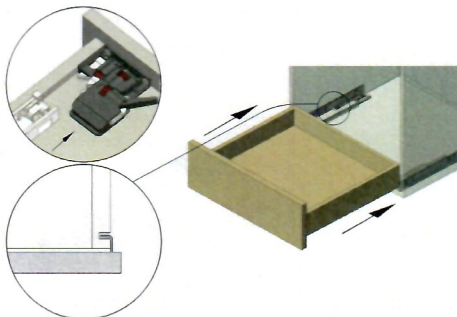

4. Adjust the front panel with plastic wheel on the handle

4.1 Front and back adjustment ±2mm.
 4.2 Left and right adjustment ±2mm.
 4.3 Up and down adjustment +3mm.

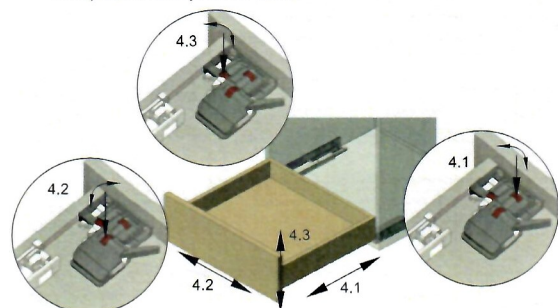

6. Push the handle lever to unlock the drawer, then pull out the drawer

